

# Upmatic® 2008





**Upmatic 2008 = computer-controlled, proportioning component weighing machine for fine and coarse products in the food and non-food-industries. The weighing range covers all weight classes between 0,5 and 25 kgs – weighing without losses.**

The Upmatic 2008 convinces by offering both precision and high speed. A feed belt conveys the product to the distributor system. Two vibrating plates ensure that the product is uniformly spread before it moves via eight generously sized chutes direct into the weighing containers. Within a few milliseconds the high performance computer then assembles the preset weight, calling up the appropriate quantities of product. A collecting belt then feeds the batch to the appropriate filling and sealing machine.

The Upmatic 2008 operates extremely reliable to a weight tolerance of less than 0,5 %, even at the astonishingly high speed of 40 cycles per minute. The freely moveable, high performance computer has a digital display, and a printer connection. A genuinely all-purpose weighing system, the Upmatic 2008 is suitable for almost any small or large food or non-food items, such as onions, potatoes, nuts, carrots, Brussels sprouts, sweets, or deep-frozen products. Different programs tailored to specific products enable the machine to be run at high speed while still remaining easy to operate.

# Upmatic® 2008

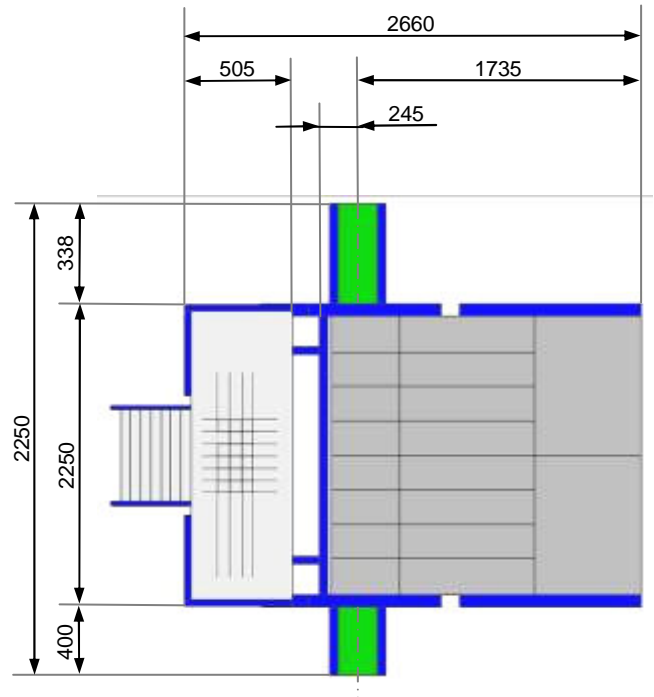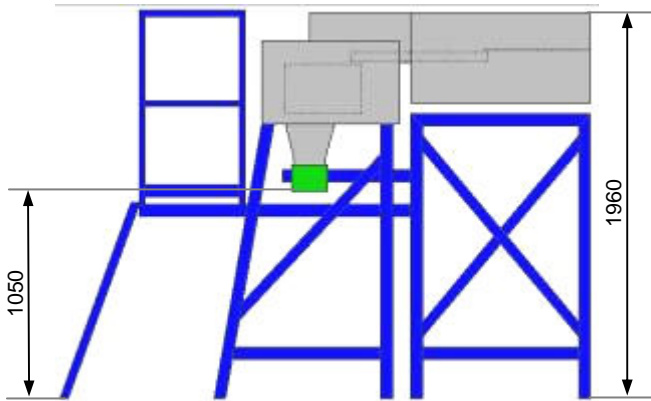

The Upmatic 2008 can be combined with all current filling and sealing machines. Upmann also supplies the associated feed belts and processing equipment to make up complete high-capacity weighing and bagging lines. The model Upmatic 2008 Z has an additional option for "counting".

The measurements may change according to individual combination with filling and closing machines.

In the interest of our customers, we reserve the right to introduce technical changes.

## Technical Data:

- Weighing range: 0,5 - 25 kgs
- Capacity:  
Upmatic 2008: 2,5 kgs: 28 cycles/min. approx.
- Supply voltage: 230/400 V, 50 Hz
- Power consumption: 4 kw
- Air pressure: 6 bar
- Air consumption: 6 l / cycle
- Weight: 1100 kg

## Models:

**Upmatic 2008:** standard model, hammer dimple enamel. finish blue/silver.  
See illustrations and explanatory text.

**Upmatic 2008E:** machine completely in stainless steel: otherwise as Upmatic 2008.

## Accessories:

- Feed belts in individual sizes
- Service platform, individual types
- „Full“ indicators
- Collecting belts

**UPMANN**   
**VERPACKUNGSMASCHINEN**

Burgsteinfurter Damm 185 · D-48432 Rheine-Mesum  
phone +49 59 75 / 92 81-0 · fax +49 59 75 / 92 81-10  
internet [www.upmann.de](http://www.upmann.de) · e-mail [info@upmann.de](mailto:info@upmann.de)