

Upmatic® 300 VCF

english




Upmatic 300 VCF = universal filling and closing machine for Carry-Fresh, Vertisac and other flat foil bags, max. bag width of 300mm, and max. bag length in one step of 460mm (double step possible).

The Upmatic 300 VCF is easy to operate and very rugged. The packing material comes from a roll and is pulled out by belts to the appropriate length, then sealed vertically and horizontally.

The Carry-Fresh bag has a banderole on the front and rear side which is sealed on the net over the whole length by separate sealing bars. By special means the sides are folded and bags with a special handle are created.

Upmatic 300 VCF can be combined with common weighing and dosing equipment. In our customers' interest, we reserve the right to introduce technical modifications.

Upmatic® 300 VCF

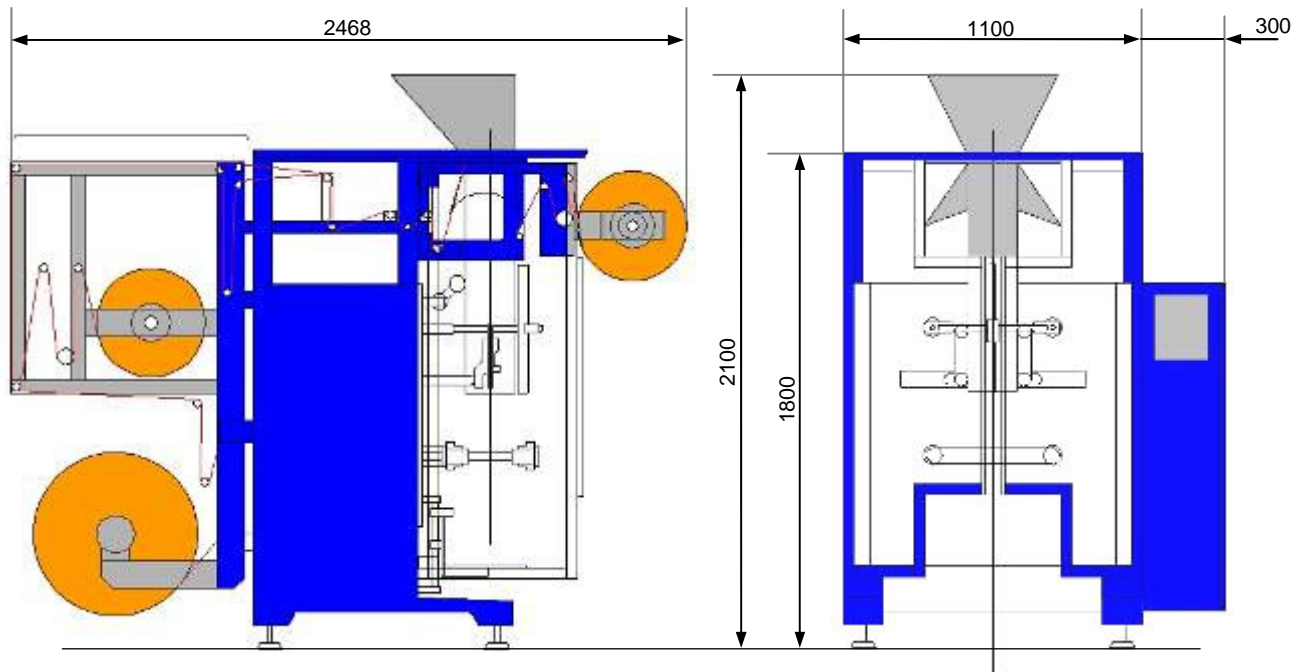

Models:

- **Upmatic 300 VCF:** standard model, hammer dimple enamel blue/silver. See illustrations and explanatory text.
- **Upmatic 300 VCFE:** machine completely in stainless steel, otherwise as Upmatic 300 VCF.

Technical Data:

- Capacity : bags up to 2,5 kgs 30 cycles/min approx.
- bag width: min: 100 mm, max: 300 mm
- bag length: min: 100 mm, max: 460 mm
- Supply voltage: 3 x 400 V + N + PE
- Power consumption : 5,5 kW
- Air pressure: 6 bar
- Air consumption : 40 l/cycle
- Weight 900kgs

Accessories:

- Packing transport belts in individual sizes
- Turntables
- Upmatic 103 pneumatic sack holding device
- Marking equipment:
 - heat printer
 - thermo printer
 - ink printer
- Funnel with opto-electronic filling control
- Feed belts in individual sizes
- Detector for foil marker on printed foil
- Individual forming systems